

Technical brochure

Temperature sensor type EKS 111



PTC temperature sensor.

The sensor can be used for measuring air temperatures in the following areas:

- Refrigeration
- Air conditioning
- Heating

PTC characteristic matches controllers types EKC 101, EKC 201, EKC 301, CC and AK.


The sensor may not be used for food safety logs or regulation of superheat.

Temperature sensor type EKS 111

Technical data

Nominal resistance	990 ohm at 25°C
Degree of accuracy	Class B (+/-1%)
Temperature range	-55 to 100°C
Temperature range for cable	-30 to 80°C
Cable material	PVC
Sensor tube	Stainless steel AISI 304
Time constant	30 seconds
Insulation resistance	DIN EN60751
Density	IP 67
AMP Plug	AMP ital mod 2, housing 280 358, Crimp contact 280 708-2

R (Typ.) Ohm	Temp. °C	Error K	Temp. °F
1679	100	+/-3.5	212
1575	90		194
1475	80		176
1378	70		158
1286	60		140
1196	50		122
1111	40		104
1029	30		86
990	25	+/-1.3	77
951	20		68
877	10		50
807	0		32
740	-10		14
677	-20		-4
617	-30		-22
562	-40		-40
510	-50		-58
485	-55	+/-3.0	-67

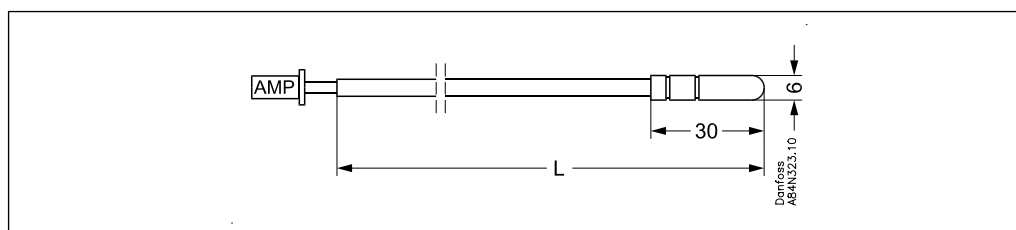

Ordering

Type	Sensor	Cable length (L)	Number	Code no.	
EKS 111	PTC	990 ohm / 25°C	1.5 m	1	084N1178
				150	084N1161
			3.5 m	1	084N1179
				150	084N1163
			6 m	1	084N1180
				80	084N1173
			8.5 m	60	084N1168
				1	084N1181
			1.5 m with AMP-plug	150	084N1174
				1	084N1182
			3.5 m with AMP-plug	150	084N1170
				1	084N1177
			6 m with AMP-plug	80	084N1171